




# 15000F ATF Automatic Transmission Fluid Ford

Document version: Apr 15, 2024

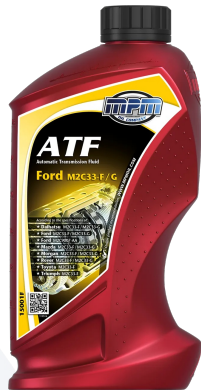

## Description

This mineral automatic transmission oil has been specially developed for automatic transmissions, power steering, torque converters and other applications for which constructors specify an ATF Ford oil.

## According to the specifications of

Daihatsu M2C33-F / M2C33-G  
Ford M2C33-F / M2C33-G / M2C9007-AA  
Mazda M2C33-F / M2C33-G  
Morgan M2C33-F / M2C33-G  
Rover M2C33-F / M2C33-G  
Toyota M2C33-F  
Triumph M2C33-F

## Packaging units

ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
15001F	1 L	6	450
15020F	20 L	1	30
15060F	60 L	1	6
15205F	205 L	1	2
15999F	1000 L	1	-

## Standard analyses

TEST	VALUE	METHOD
Density at 15°C	0.869	kg/l
Colour	red	
Viscosity	10W	
Kinematic Viscosity at 40°C	34.9	mm <sup>2</sup> /s
Kinematic Viscosity at 100°C	7.21	mm <sup>2</sup> /s
Viscosity Index	177	
Flashpoint COC	195	°C
Pourpoint	-41	°C

These characteristics are typical of current production. Variations in these characteristics may occur.