




# 17000 ATF Automatic Transmission Fluid Suffix A

Document version: Apr 15, 2024

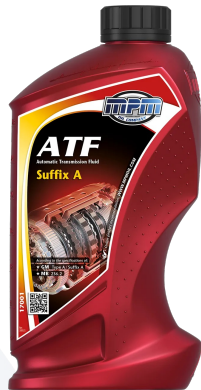

## Description

This mineral ATF suffix A automatic transmission oil has been specially developed for semi-automatic transmissions, hydraulic systems, power steering, torque converters, machine tools etc. and other applications for which manufacturers specify an ATF-A oil.

## According to the specifications of

GM type A / Suffix A  
MB 236.2

## Packaging units

ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
17001	1 L	6	450
17020	20 L	1	30
17060	60 L	1	6
17205	205 L	1	2
17999	1000 L	1	-

## Standard analyses

TEST	VALUE	METHOD
Density at 15°C	0.878 kg/l	
Colour	yellowbrown_amber	
Viscosity	10W	
Kinematic Viscosity at 40°C	37 mm <sup>2</sup> /s	
Kinematic Viscosity at 100°C	7.12 mm <sup>2</sup> /s	
Viscosity Index	158	
Flashpoint COC	198 °C	
Pourpoint	-41 °C	
Total Base Number	6.9 mgKOH/g	
Sulphated Ash	1.6 mass%	

These characteristics are typical of current production. Variations in these characteristics may occur.